


Unleash the Vision!

Multi-screen, spectacular experience

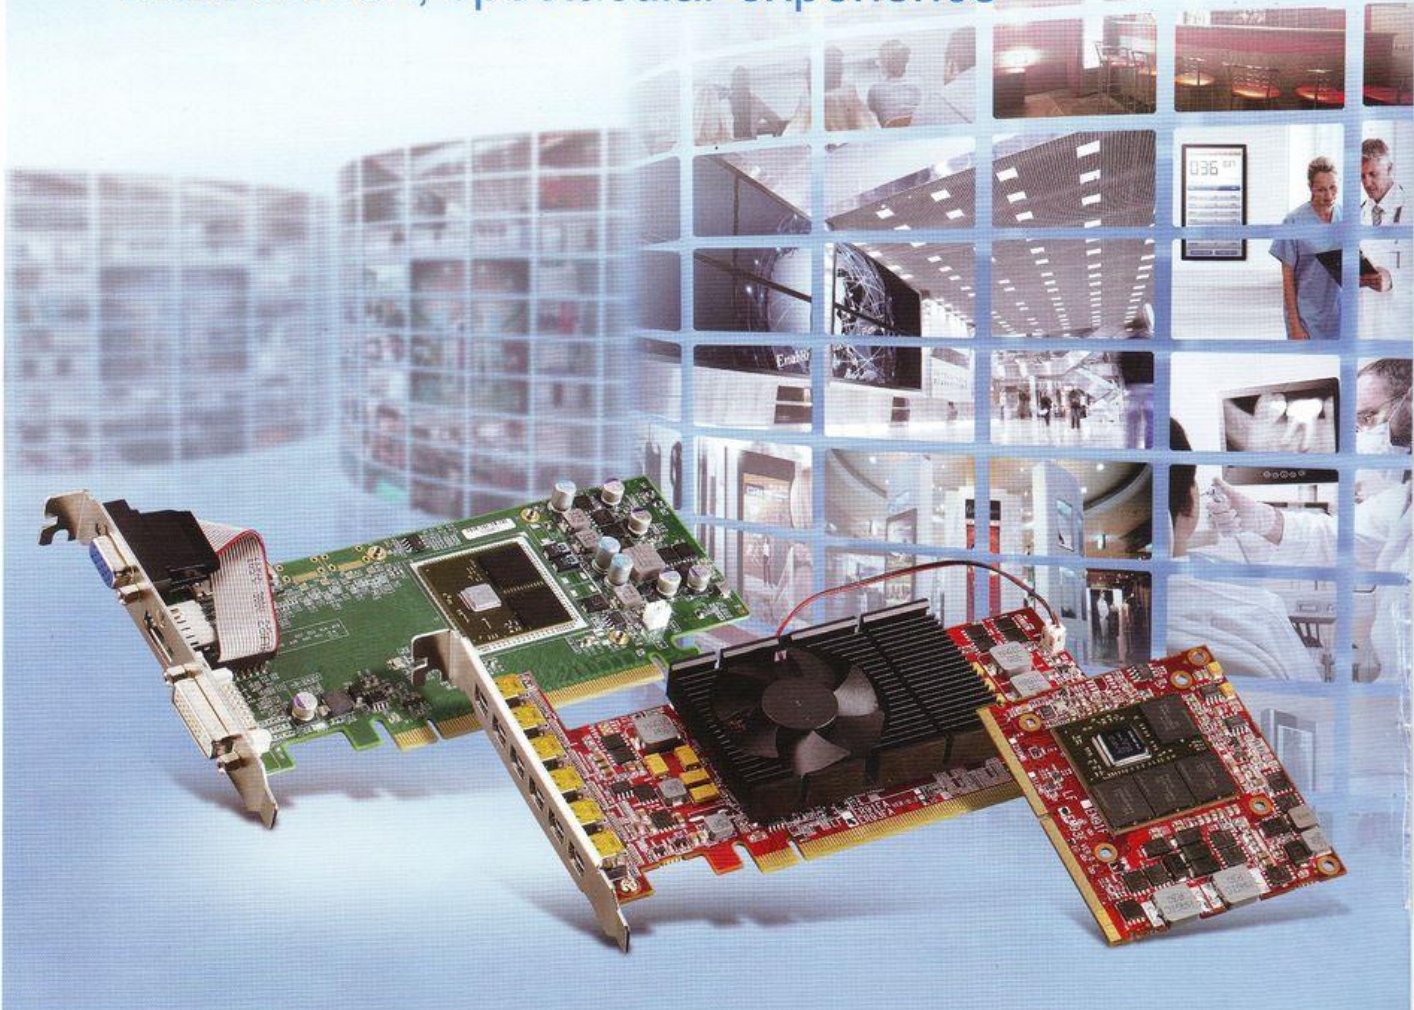

5+ years planned availability

Value GFX-A5T4

AMD Radeon™ E6460 Embedded GPU

- » 512MB GDDR5, DirectX®11
- » OpenGL 4.1, OpenCL™ 1.1 UVD3, AMD Eyefinity, PCIe® 2.1
- » Up to 4x display outputs: RGB / DVI / HDMI™ / LVDS
- » Display Port 1.1a/1.2

Performance GFX-A5T7

AMD Radeon™ E6760 Embedded GPU

- » 1GB GDDR5, DirectX® 11
- » OpenGL 4.1, OpenCL™ 1.1 UVD3, AMD Eyefinity, PCIe® 2.1
- » Up to 6x display outputs: RGB / DVI / HDMI™ / LVDS
- » Display Port 1.1a/1.2



ADVANTECH

Enabling an Intelligent Planet

For sales inquiries and further information, please contact:
Embedded.graphic@advantech.com.tw

www.advantech.com

■ Embedded PCI-Express Add-in-board Specification

AMD Radeon™ E6460



| Feature | GFX-A5T4-30 | GFX-A5T4-20 | GFX-A5T4-00 | GFX-A5T4-01 |
|--|--|---------------------------|---------------------------|-------------------|
| Graphics Processing Unit | | | | |
| Graphics Engine Operating Frequency (max.) | 600 MHz | | | |
| Form Factor | ATX (168 x 110 mm) | Low profile (168 x 69 mm) | Low profile (168 x 69 mm) | ATX (168 x 95 mm) |
| GPU Interface | PCI-Express 2.1 (x16) | | | |
| Unified Video Decoder (UVD) | UVD3 for H.264, VC-1, MPEG-2, MPEG-4 part 2 decode | | | |
| Memory | | | | |
| Operating Frequency (max.) | 800 MHz / 3.2 Gbps | | | |
| Configuration / Type | 64-bit wide, 512 MB, GDDR5, 25.6 GB/s | | | |
| Display Interfaces | | | | |
| Single / Dual-Link DVI | Single-Link DVI-I | - | Single-Link DVI-I | Single-Link DVI-D |
| Display Port 1.1a/2.0 | 2x Mini Display Port | 4x Mini Display Port | 1x Display Port | 1x Display Port |
| HDMI 1.4 | 1x HDMI | - | - | VGA |

AMD Radeon™ E6760



| Feature | GFX-A5T7-20 | GFX-A5T7-10 | GFX-A5T7-00 | GFX-A5T7-01 |
|--|--|----------------------|---------------------------|-------------------|
| Graphics Processing Unit | | | | |
| Graphics Engine Operating Frequency (max.) | 600 MHz | | | |
| Form Factor | Low profile (168 x 69 mm) | ATX (168 x 95 mm) | Low profile (168 x 69 mm) | ATX (168 x 95 mm) |
| GPU Interface | PCI-Express 2.1 (x16) | | | |
| Unified Video Decoder (UVD) | UVD3 for H.264, VC-1, MPEG-2, MPEG-4 part 2 decode | | | |
| Memory | | | | |
| Operating Frequency (max.) | 800 MHz / 3.2 Gbps | | | |
| Configuration / Type | 128-bit wide, 1 GB, GDDR5, 51.2 GB/s | | | |
| Display Interfaces | | | | |
| Single / Dual-Link DVI | - | - | Single-Link DVI-I | Single-Link DVI-D |
| Display Port 1.1a/2.0 | 4x Mini Display Port | 6x Mini Display Port | 1x Display Port | 1x Display Port |
| HDMI 1.4 | - | - | - | VGA |

■ Embedded MXM Module Specification



| Feature | GFX-A5T4-40 AMD Radeon™ E6460 | GFX-A5T7-40 AMD Radeon™ E6760 |
|--|--|--------------------------------------|
| Graphics Processing Unit | | |
| Graphics Engine Operating Frequency (max.) | 600 MHz | |
| MXM type | MXM 3.0, Type A | |
| CPU Interface | PCI-Express 2.1 (x1, x2, x4, x8, x16) | |
| Unified Video Decoder (UVD) | UVD3 for H.264, VC-1, MPEG-2, MPEG-4 part 2 decode | |
| Memory | | |
| Operating Frequency (max.) | 800 MHz / 3.2 Gbps | |
| Configuration / Type | 64-bit wide, 512 MB, GDDR5, 25.6 GB/s | 128-bit wide, 1 GB, GDDR5, 51.2 GB/s |

ADVANTECH

Enabling an Intelligent Planet

www.advantech.com

Please verify specifications before ordering. This guide is intended for reference purposes only. All product specifications are subject to change without notice.

No part of this publication may be reproduced in any form or by any means, electronic, photocopying, recording or otherwise, without prior written permission of the publisher.

All brand and product names are trademarks or registered trademarks of their respective companies. © Advantech Co., Ltd. 2012